

LINOVISION

4G LTE MIMO + WiFi 3-in-1 Combo

Antenna

ANT-4GCombo3

Quick Guide (V1.0/2026-4-22)

Package Contents




ANT-4GCombo3



Quick Guide

Interface

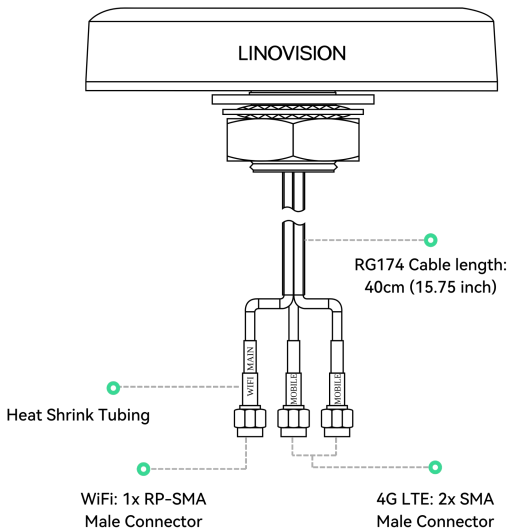


WiFi: 1x RP-SMA
Male Connector

4G LTE: 2x SMA
Male Connector


Installation

1


Hole size::
0.45"(11.32mm)




2



3



4



Specifications

Model	ANT-4GCombo3	
LTE Antenna	Frequency Range	698~960MHz/1710~2690MHz
	V.S.W.R	< 3.0
	Polarization	Linear
	Gain	2.5dBi (Zenith)
	Impedance	50Ω
LTE Antenna AUX	Frequency Range	698~960MHz/1710~2690MHz
	V.S.W.R	< 3.0
	Polarization	Linear
	Gain	2.0dBi (Zenith)
	Impedance	50Ω
WIFI Antenna	Frequency Range	2400~2483.5MHz/4900~5825 MHz
	V.S.W.R	< 2.0
	Polarization	Linear
	Gain	3.0dBi (Zenith)
	Impedance	50Ω
Mechanical	Cable	RG174
	Connector	SMA or others
	Material	ABS
	Mounting Method	Screw
Environmental	Operating Temperature	-40°C~+85°C
	Relative Humidity	Up to 95%
	Ingress Protection	IP67 (exclude cable outlet)
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant