



Model: IPC725-10XN

5MP Outdoor 10X Bullet IP Camera With Motorized lens

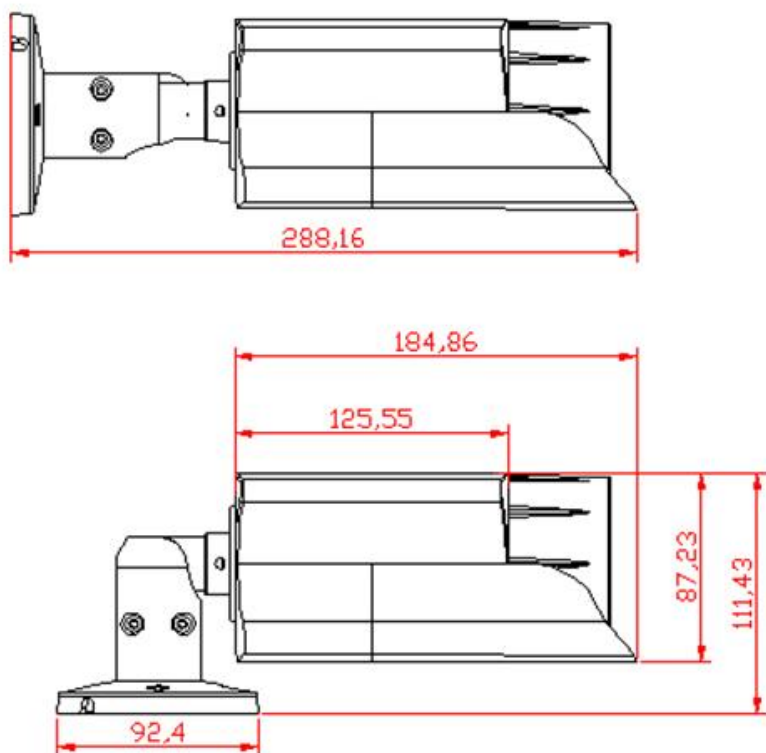

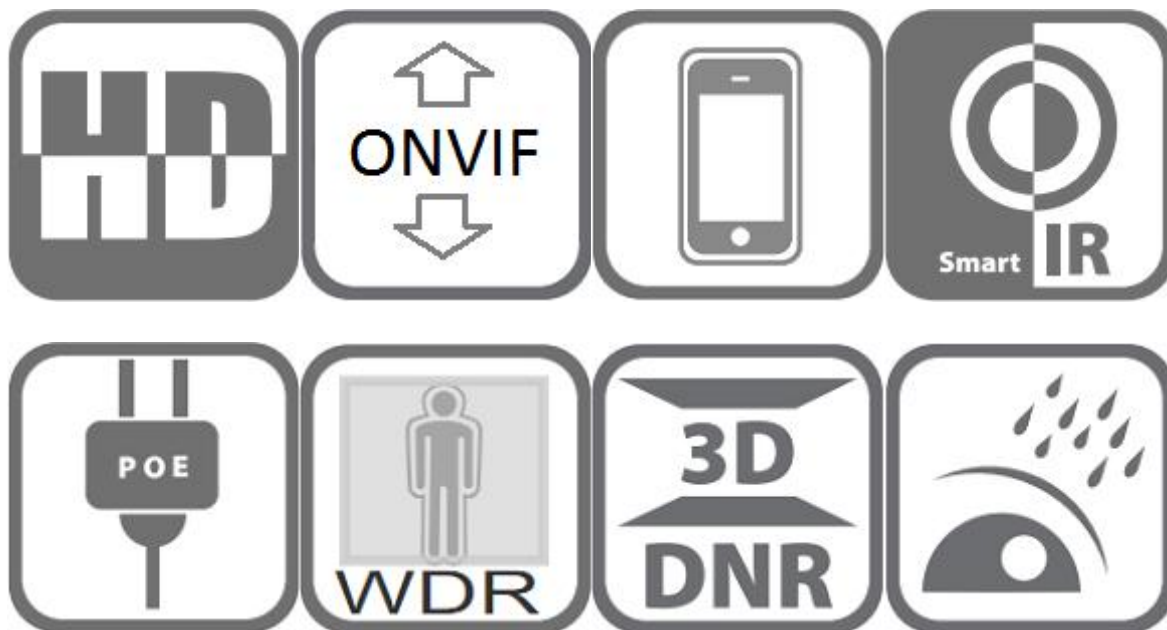

Features:

- ❖ 1/2.8" Sony IMX335 CMOS sensor
- ❖ Full HD resolution 2592 x 1944P
- ❖ Ultra low illumination 0.001Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 11.07 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ Optional customization Lens/Audio/Alarm/Storage/POE, etc.
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 4pcs IR Array Leds, IR distance 70-80 meters
- ❖ 5-50mm Motorized lens

Technical Specifications:

Model	IPC725-10XN
Camera	
Image Sensor	1/2.8" Sony IMX335 CMOS
Effective Pixels	2592 (H) × 1944 (V)

Electronic Shutter	AUTO, 1/25s ~ 1/1000000s
Min. Illumination	0.001Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
AGC/BLC	Support
DNR	2D/3D DNR
Other	Motion Detection, Privacy Mask, Mirror, flip
Encode	
Embedded Solution	Mstar 316DM
Video Standard	H.265/H.264
Video Resolution	Main Stream:15fps@ 5MP(2592*1944) , 25fps@ 4MP(2592*1520) Sub Stream: VGA(640x480)/360P@25fps, etc.
Video Bitrates	32Kbps - 6Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
IR Led	
IR Led	4pcs IR Array LEDs. 70-80M IR Distance
Lens	
Focal length	5-50mm Motorized lens
Optional Function	
With POE, with SD Slot	
Network Services	
Protocol	RTSP/FTP/DHCP/NTP etc.
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	11.07 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC $\pm$ 10%
Power Consumption	< 10 W
Operating Temp.	-30°C -(+60)°C, 10%-90%RH