

# NDAA 8ch PoE NVR

## NVR-6108P8L



## Key Features


- Support Ultra265/H.265/H.264 video formats
- 8-channel input
- Plug & Play with 8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- Up to 4K resolution recording
- 1 SATA HDD, up to 6 TB
- Support cloud upgrade

## Specifications

| Model                     | NVR6108P8L   |
|---------------------------|--|
| <b>Video/Audio Input</b>  |  |
| IP Video Input            | 8-ch   |
| <b>Network</b>            |  |
| Incoming Bandwidth        | 64Mbps   |
| Outgoing Bandwidth        | 48Mbps   |
| Remote Users              | 128  |
| Protocols                 | P2P, UPnP, NTP, DHCP, PPPoE  |
| <b>Video/Audio Output</b> |  |
| HDMI/VGA Output           | HDMI:<br>3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz,<br>1280x720/60Hz, 1024x768/60Hz<br>VGA: |

|                           |  |
|---------------------------|--|
|                           | 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Recording Resolution      | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF   |
| Audio Output              | 1-ch, RCA  |
| Synchronous Playback      | 8-ch   |
| Corridor Mode Screen      | 3/4/5/7/9  |
| <b>Decoding</b>           |  |
| Decoding format           | Ultra265/H.265/H.264   |
| Live view/Playback        | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF   |
| Capability                | 1 x 4k@30, 1 x 5MP@30, 2 x 4MP@30, 4 x 3MP@25, 4 x 1080p@30, 8 x 720p@30                       |
| <b>Hard Disk</b>          |  |
| SATA                      | 1 SATA interfaces  |
| Capacity                  | Up to 6TB for each disk  |
| <b>Smart</b>              |  |
| VCA Detection             | Face detection, Intrusion detection, Cross line detection, Audio detection                     |
| VCA Search                | Face search, Behavior search   |
| <b>External Interface</b> |  |
| Network Interface         | 1 RJ-45 10M/100Mself-adaptive Ethernet Interface   |
| USB Interface             | Rear panel: 2 x USB2.0   |
| <b>PoE</b>                |  |
| Interface                 | 8 RJ-45 10M/100Mself-adaptive Ethernet Interface   |
| Max Power                 | Max 30W for single port<br>Max 75W in total  |
| Supported Standard        | IEEE 802.3at, IEEE 802.3af   |
| <b>General</b>            |  |
| Power Supply              | 52V DC<br>Power Consumption: ≤9 W (without HDD)  |
| Working Environment       | -10° C~+55° C (+14° F~+131° F), Humidity ≤ 90% RH (non-condensing)                             |
| Dimensions (W×D×H)        | 260mm × 240mm × 46 mm (10.2" × 9.4" × 1.8")  |
| Weight (without HDD)      | ≤1.1kg (2.43lb)  |

### Dimensions

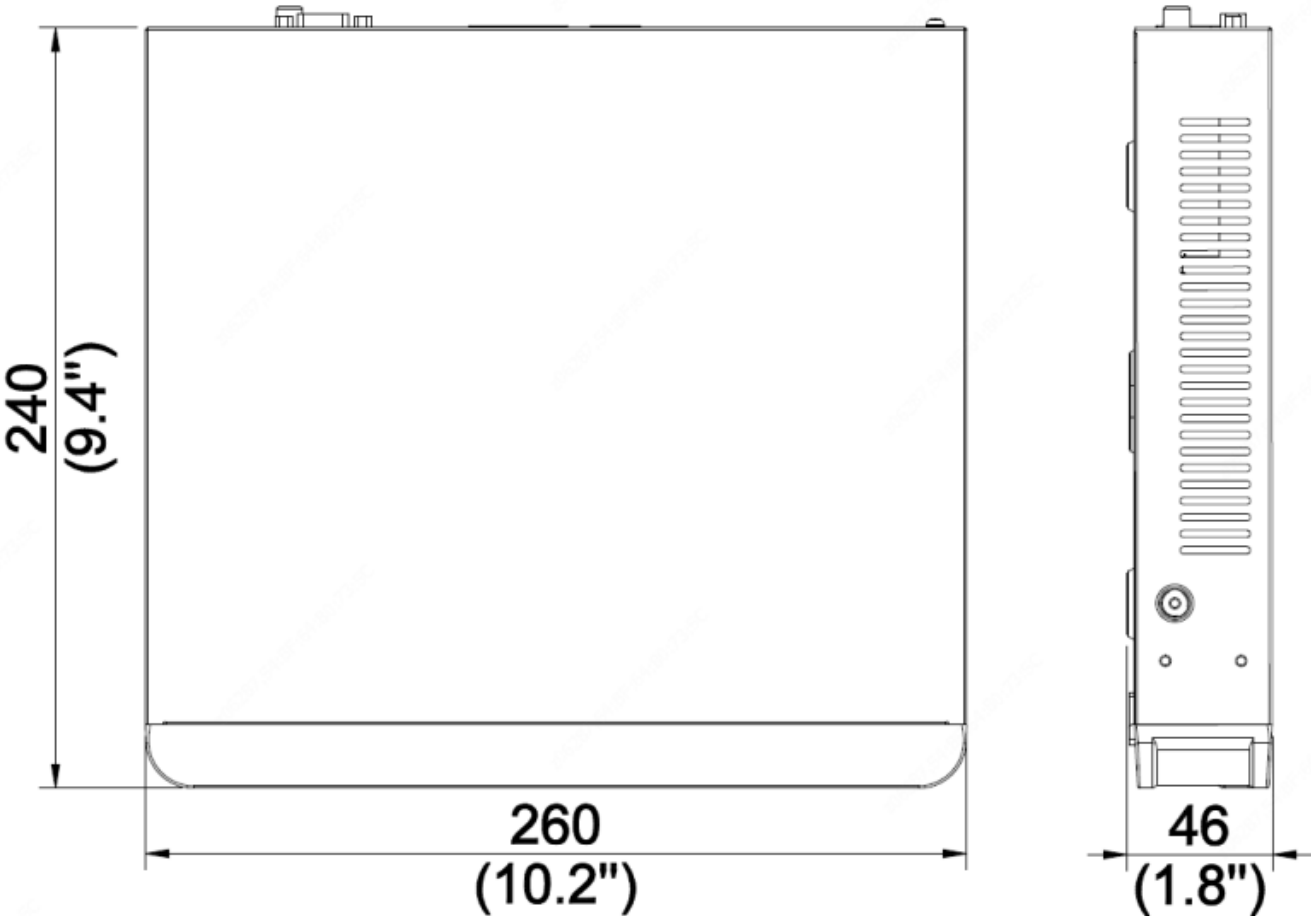

### Rear Panel

