

LINOVISION

90W 10G PoE Injector with LED
Indicator
POE-IN9001G10
Quick Guide (V1.0/2026-4-3)




Quick Guide

Package Contents



POE-IN9001G10




GaN Power Cord



Quick Guide

Interface

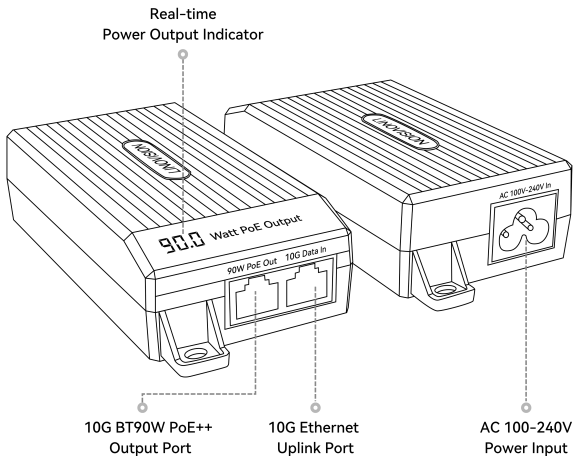


Real-time
Power Output Indicator

10G BT90W PoE++
Output Port


10G Ethernet
Uplink Port

AC 100-240V
Power Input

Installation




Desktop

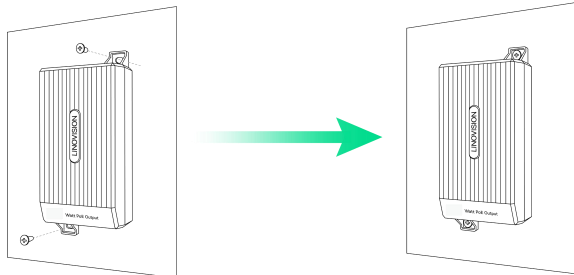

Wall-mounting

Interface

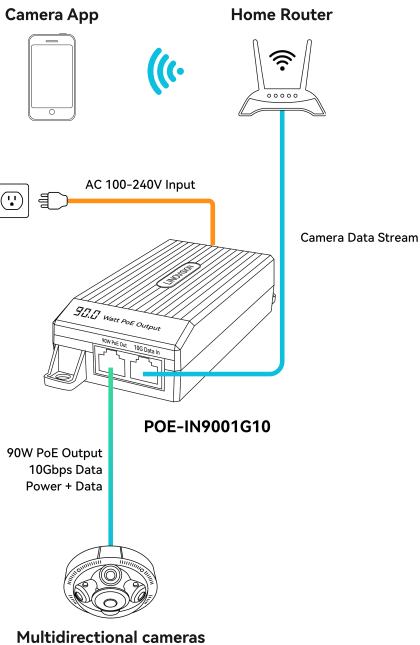

Specifications

Hardware	
Dimensions (W*D*H)	63 × 139 × 33 mm (2.48 × 5.47 × 1.30 in)
Weight	192 g (0.423 lb)
Installation	Wall Mount
Material	ABS
Interface	
LED Digital Display	PoE Output Power
Ethernet Ports	1 × 10/100/1000M,2.5G,10G bps PoE++ RJ45 Port, PoE out 1 × 10/100/1000M,2.5G,10G bps RJ45 Port, Data in
AC Power Socket	IEC 60320 C6
Power Input	
AC Input	100 to 240V AC, 50 to 60 Hz
PoE	
PoE Standard	IEEE 802.3 af/at/bt
Pin Assignment	Full Pair PoE (4-Pair), 1/2 (-), 3/6 (+), 4/5 (+), 7/8 (-)
PoE Output	Max. 90W
Environment	
Operating Temperature	14°F to 131°F (-10°C to 55°C)
Storage Temperature	-40°F to 158°F (-40°C to 70°C)
Operating Humidity	Max. 90%, non-condensing
Storage Humidity	Max. 90%, non-condensing