


POE-SWR410UR

8 Ports UltraReach PoE Switch With Remotely Cloud Management

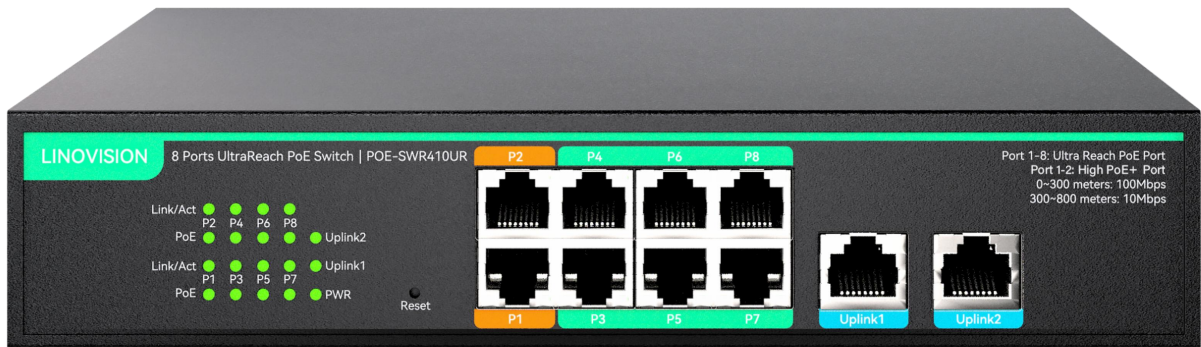

Outstanding Features

- **8 Ports UltraReach PoE Switch:** Provides 8 10/100Mbps IEEE802.3af/at compliant PoE ports and 2 Gigabit ethernet uplinks.
- **2600ft UltraReach PoE:** All PoE ports adopts Linovision proprietary UltraReach PoE technology and extend PoE & data up to 2,600ft or 800 meters. It offers great flexibility for cabling. (POE-EXT3001LP (ASIN: B0CTH7WNPK) should be connected at the remote side and is sold separately.)
- **High PoE+ Output:** The first two ports provide 45W High PoE+ output, suitable for big PTZ cameras or multi-imager cameras.
- **Remotely Cloud Managed:** via WEB GUI or RemoteMonit CLOUD. It supports VLAN, QOS and PoE port management, including PoE On/Off control, Power budget, priority, etc.
- **Package:** includes built-in 130W power supply.
- **Important Notification:** POE-EXT3001LP works with standard PoE device only. Non-PoE device can not be used in UltraReach transmission.

Specification

Mechanical

Material	Metal
Weight	1.2kg(2.64lb)
Dimension	8.66"*5.90"*1.77"(220*150*45mm)
Storage Temperature	-40°F to 158°F (-40°C to +70°C)
Operating Temperature	32°F to 104°F (0°C to +40°C)
Operating Humidity	10% ~ 90% non-condensing
Storage Humidity	5% ~ 90% non-condensing

Interfaces

Input Power Supply	AC: 100-240V 50/60Hz
Network	8 * 10/100Mbps RJ45 Ports / 2 * 10/100/1000Mbps RJ45 Ports
Indicator	PWR(Green), LNK/ACT(Green), PoE(Orange)
Standard	IEEE802.3,IEEE802.3i,IEEE802.3u,IEEE802.3x,IEEE802.1q,IEEE802.1p,IEEE802.3af, IEEE802.3at

Ethernet

PoE Output Ports	Port 1-2: High PoE+, IEEE 802.3af/at, 45W(Max), Mode A(Pins 1/2[+], 3/6[-]) Port 3-8: PoE+, IEEE 802.3af/at, Mode A(Pins 1/2[+], 3/6[-])
Power Supply	130W
PoE Power Budget	120W

Switching Features

MAC Address Table	8K
Packet Buffer	4Mbits
Jumbo Frame	9216Byte
Switching Capacity	5.6Gbps
Packet Forward Speed	4.17Mpps

Environment

Surge Protection	Differential mode ±2KV,Common mode ±4KV
------------------	---

**Disclaimer: Technical specifications may subject to change without prior notice*

Specification

Electrostatic Standard	Contact ±6KV, Air ±8KV
MTBF	>50000 hours

Dimension




Weight: 1.2kg(2.64lb)

**Disclaimer: Technical specifications may subject to change without prior notice*

Interface

Front View

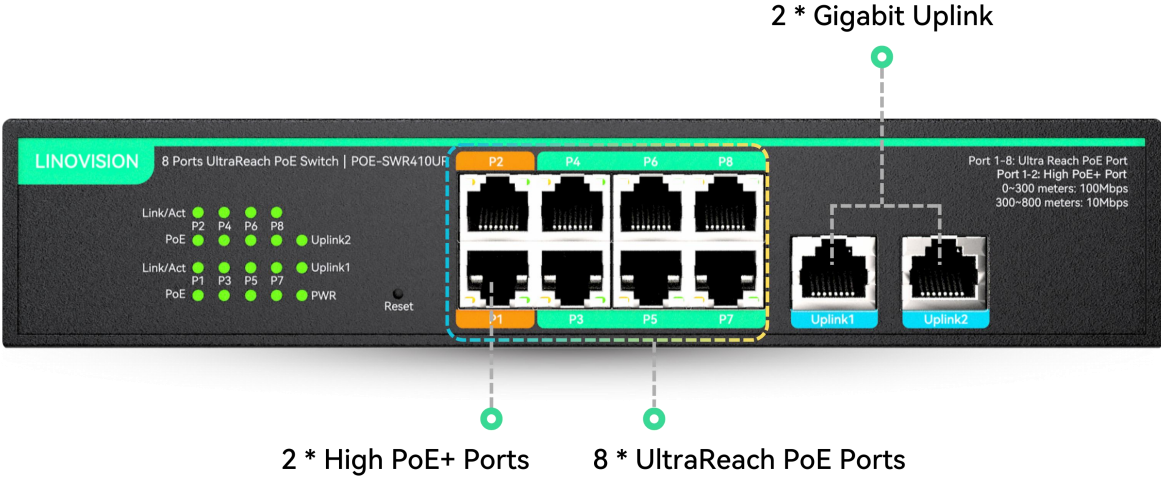


Total PoE Budget 120W

Back View



**Disclaimer: Technical specifications may subject to change without prior notice*

Connection Diagram

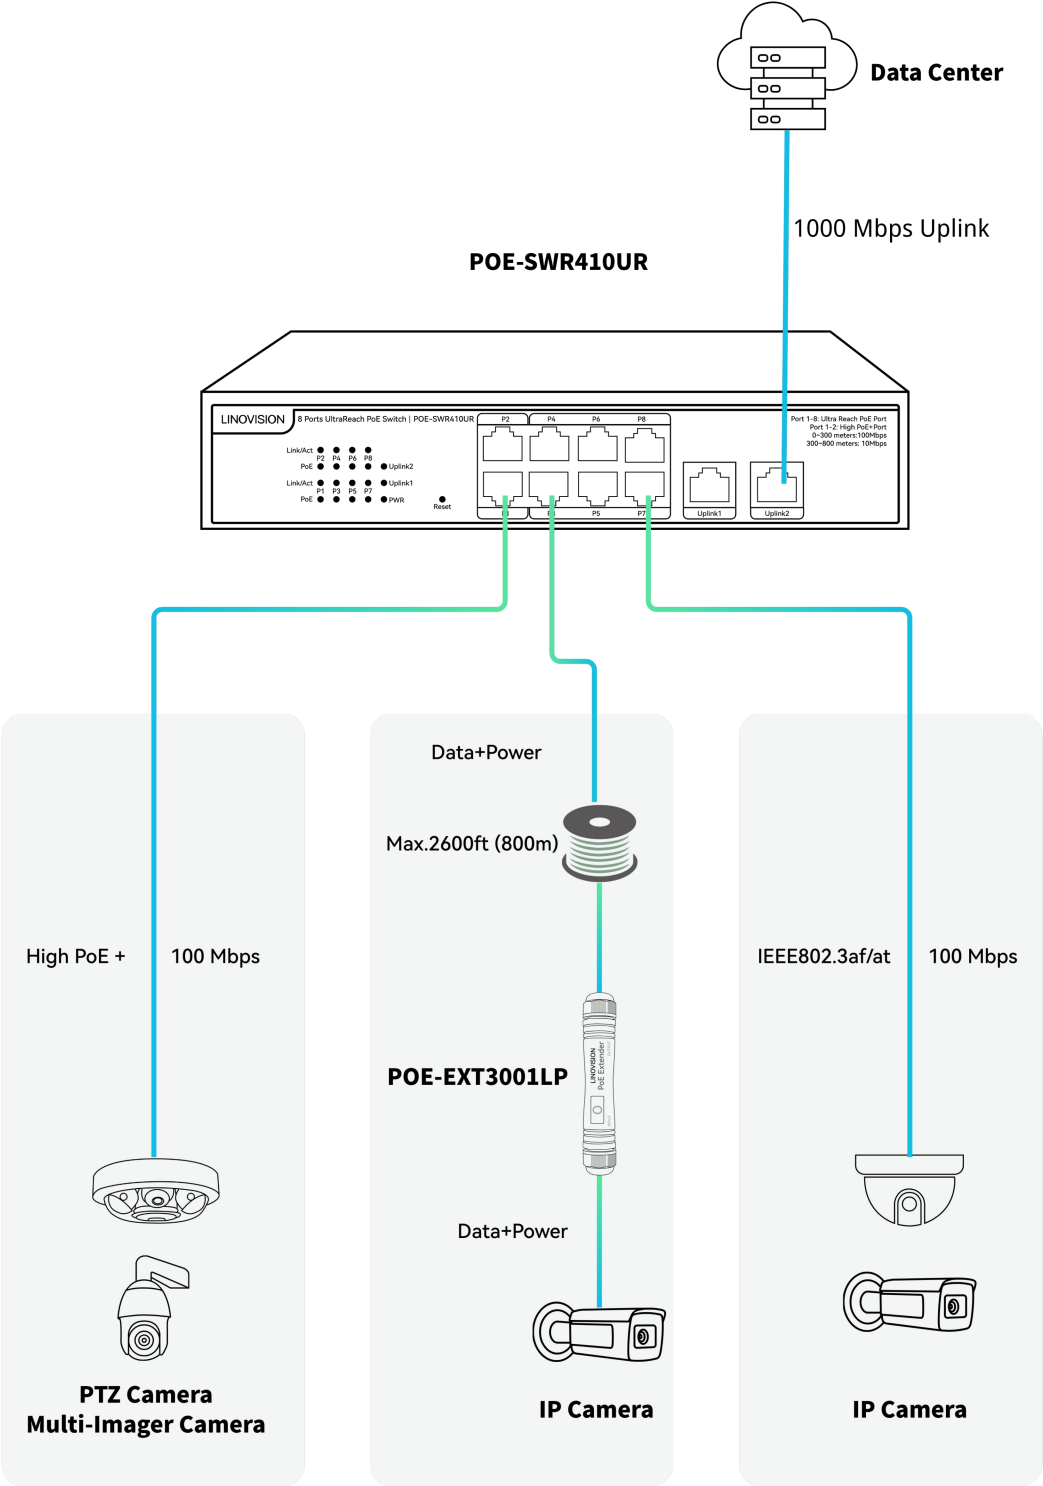

*Disclaimer: Technical specifications may subject to change without prior notice

Package



POE-SWR410UR



Power Adapter



User Manual